


Cyclone tube-filter

Type: PCS

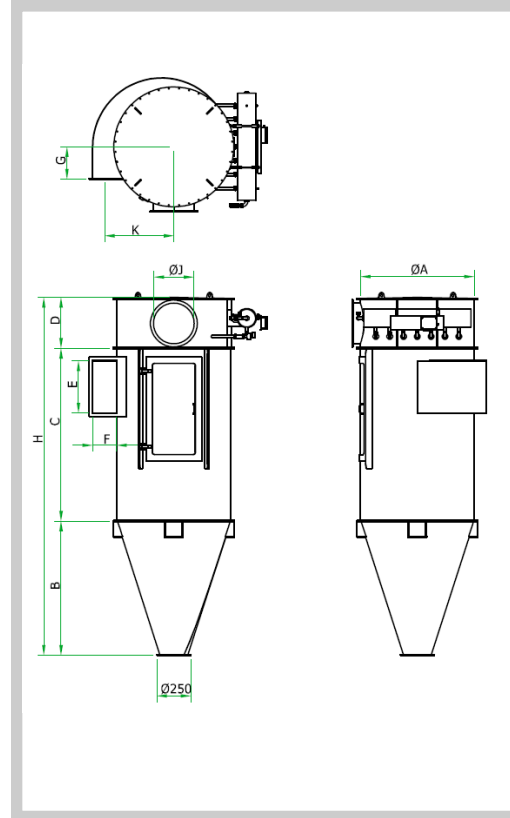

Type	Filter area m ²	Dimensions										Weight kg	Air use* Nm ³ /h
		A	B	C	D	E	F	G	H	J	K		
PCS07/15	3,9	650	600	1490	362	250	140	200	2452	250	395	280	3,2
PCS07/20	5,2	650	600	1990	362	250	140	200	2952	250	395	320	3,5
PCS07/25	6,5	650	600	2480	362	250	140	200	3442	250	395	360	3,8
PCS07/30	7,9	650	600	2980	362	250	140	200	3942	250	395	400	4,1
PCS07/35	9,1	650	600	3480	362	250	140	200	4442	250	395	440	4,4
PCS12/15	6,8	850	850	1490	412	320	180	250	2752	300	515	430	4,2
PCS12/20	9,1	850	850	1990	412	320	180	250	3252	300	515	490	4,6
PCS12/25	11,3	850	850	2480	412	320	180	250	3742	300	515	550	5
PCS12/30	13,6	850	850	2980	412	320	180	250	4242	300	515	610	5,4
PCS12/35	15,8	850	850	3480	412	320	180	250	4742	300	515	670	5,8
PCS18/15	10,1	1050	1100	1490	462	400	220	300	3052	350	635	540	5,2
PCS18/20	13,5	1050	1100	1990	462	400	220	300	3552	350	635	600	5,7
PCS18/25	16,9	1050	1100	2480	462	400	220	300	4042	350	635	660	6,2
PCS18/30	20,3	1050	1100	2980	462	400	220	300	4542	350	635	720	6,7
PCS18/35	23,6	1050	1100	3480	462	400	220	300	5042	350	635	780	7,2
PCS28/15	15,8	1200	1350	1490	512	500	270	350	3352	400	735	620	9,8
PCS28/20	21,1	1200	1350	1990	512	500	270	350	3852	400	735	690	10,7
PCS28/25	26,3	1200	1350	2480	512	500	270	350	4342	400	735	760	11,6
PCS28/30	31,6	1200	1350	2980	512	500	270	350	4842	400	735	830	12,5
PCS28/35	36,9	1200	1350	3480	512	500	270	350	5342	400	735	900	13,4
PCS39/15	22	1400	1650	1490	612	650	300	400	3752	500	850	950	13,3
PCS39/20	29,3	1400	1650	1990	612	650	300	400	4252	500	850	1060	14,6
PCS39/25	36,6	1400	1650	2480	612	650	300	400	4742	500	850	1170	15,9
PCS39/30	44	1400	1650	2980	612	650	300	400	5242	500	850	1280	17,2
PCS39/35	53,3	1400	1650	3480	612	650	300	400	5742	500	850	1390	18,5

Cyclone tube-filter

Type: PCS

Type	Filter area m ²	Dimensions										Weight kg	Air use* Nm ³ /h
		A	B	C	D	E	F	G	H	J	K		
PCS52/15	29,3	1600	1880	1490	712	800	350	450	4082	600	975	1250	19
PCS52/20	39,1	1600	1880	1990	712	800	350	450	4582	600	975	1380	20,8
PCS52/25	48,9	1600	1880	2480	712	800	350	450	5072	600	975	1500	22,6
PCS52/30	58,7	1600	1880	2980	712	800	350	450	5572	600	975	1630	24,4
PCS52/35	68,4	1600	1880	3480	712	800	350	450	6072	600	975	1750	26,2
PCS74/15	41,8	1900	2300	1490	762	900	450	500	4552	650	1175	1500	28
PCS74/20	55,8	1900	2300	1990	762	900	450	500	5052	650	1175	1670	30
PCS74/25	69,7	1900	2300	2480	762	900	450	500	5542	650	1175	1840	32
PCS74/30	83,6	1900	2300	2980	762	900	450	500	6042	650	1175	2010	34
PCS74/35	97,6	1900	2300	3480	762	900	450	500	6542	650	1175	2180	36
PCS90/15	50,8	2100	2580	1490	812	1000	500	500	4882	700	1300	1770	38
PCS90/20	67,8	2100	2580	1990	812	1000	500	500	5382	700	1300	1970	40
PCS90/25	84,7	2100	2580	2480	812	1000	500	500	5872	700	1300	2170	42
PCS90/30	101,7	2100	2580	2980	812	1000	500	500	6372	700	1300	2540	44
PCS90/35	118,7	2100	2580	3480	812	1000	500	500	6872	700	1300	2560	46
PCS112/15	63,3	2400	3000	1490	912	1100	550	550	5402	800	1475	2070	46
PCS112/20	84,4	2400	3000	1990	912	1100	550	550	5902	800	1475	2300	48
PCS112/25	105,5	2400	3000	2480	912	1100	550	550	6392	800	1475	2430	50
PCS112/30	126,7	2400	3000	2980	912	1100	550	550	6892	800	1475	2560	53
PCS112/35	147,8	2400	3000	3480	912	1100	550	550	7392	800	1475	2690	55
PCS148/15	83,6	2600	3280	1490	1012	1200	650	600	5782	900	1625	2520	53
PCS148/20	111,5	2600	3280	1990	1012	1200	650	600	6282	900	1625	2850	56
PCS148/25	139,5	2600	3280	2480	1012	1200	650	600	6772	900	1625	3000	59
PCS148/30	167,3	2600	3280	2980	1012	1200	650	600	7272	900	1625	3150	61
PCS148/35	195,2	2600	3280	3480	1012	1200	650	600	7772	900	1625	3300	64
PCS166/15	93,8	2800	3400	1490	1062	1250	700	650	5952	950	1750	3210	53
PCS166/20	125,1	2800	3400	1990	1062	1250	700	650	6452	950	1750	3410	46
PCS166/25	156,4	2800	3400	2480	1062	1250	700	650	6942	950	1750	3600	59
PCS166/30	187,6	2800	3400	2980	1062	1250	700	650	7442	950	1750	3790	61
PCS166/35	218,9	2800	3400	3480	1062	1250	700	650	7942	950	1750	3980	64
PCS208/15	117,6	3100	3900	1490	712	1300	880	700	6102	1630x600	1990	3820	61
PCS208/20	156,7	3100	3900	1990	712	1300	880	700	6602	1630x600	1990	4010	64
PCS208/25	195,9	3100	3900	2480	712	1300	880	700	7092	1630x600	1990	4200	67
PCS208/30	235,1	3100	3900	2980	712	1300	880	700	7592	1630x600	1990	4390	70
PCS208/35	274,3	3100	3900	3480	712	1300	880	700	8092	1630x600	1990	4520	73

* at 6 bar and use of basic controller

Dimensions are for indication only. Additional data will be sent on request.

